

TECHNICAL DATA

ENGINE

Engine	Cummins QSF 3.8 L four-cylinder diesel
Emission Stage	5
Power	97 kW / 130 HP
Diesel feul tank	46 gal (174 l)

TRANSMISSION

Hydraulic transmission	
------------------------	--

WEIGHT

	4-WHEEL	QUAD-TRACK
Weight	24,820 lbs (11,258 kg)	28,649 lbs (12,995 kg)
Ground pressure	6.7 psi (0.46 kg/cm²)	5.3 psi (0.35 kg/cm²)

DIMENSIONS

	4-WHEEL	QUAD-TRACK
Width	max. 10ft, 4 in (2.62 – 3.15 m)	8 ft, 6 in (2.59 m)
Length	25 ft, 4 in (7.62 m)	25 ft, 4 in (7.62 m)
Total length	41 ft, 6 in (12.65 m)	41 ft, 6 in (12.65 m)
Height	11 ft, 6 in (3.51 m)	11 ft, 6 in (3.51 m)

BOOM


Cutting height maximum	75 ft (23 m)
Saw blade diameter	24 in (610 mm)
Saw blade rotation	180°
Boom non-conductive according to ANSI 92.2 Cat. C standard	

WINCH

Length	150 ft (45 m)
Traction force	20,000 lbs (9,000 kg)

4-WHEEL-DRIVE

Tire size	28 L x 26
Wheel-Base	140 in (3,550 mm)
Max. Speed	(12.4 mph) 20 km / h

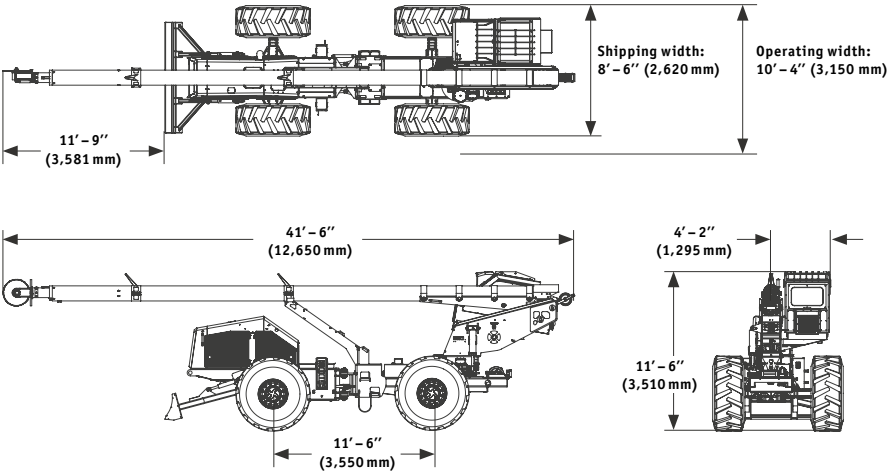

QUAD-TRACK UNDERCARRIAGE

Crawler type	with rubber undercarriage
Width	24 in (610 mm)
Max. Speed	(7.5 mph) 12 km / h

